




MODELLO MAP63 MODEL MAP63

CODICE CODE

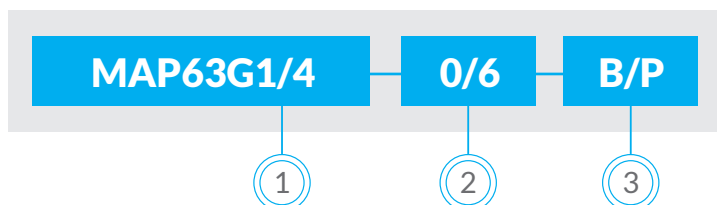

1	CONNESSIONE AL PROCESSO PROCESS CONNECTION	CODICE CODE	2	SCALA RANGE	CODICE CODE	SCALA RANGE	CODICE CODE
	1/4" gas cilindrico	G1/4		-1 ... 0	-1/0	0 ... 10	0/10
	1/4"npt	N1/4		-1 ... 0.6	-1/0.6	0 ... 12	0/12
	1/4" gas conico	R1/4		-1 ... 1.5	-1/1.5	0 ... 16	0/16
	Altro/another	*		-1 ... 3	-1/3	0 ... 20	0/20
				-1 ... 5	-1/5	0 ... 25	0/25
				-1 ... 9	-1/9	0 ... 40	0/40
				-1 ... 15	-1/15	0 ... 60	0/60
				-1 ... 24	0/24	0 ... 100	0/100
				0 ... 0.6	0/0.6	0 ... 160	0/160
				0 ... 1	0/1	0 ... 200	0/200
				0 ... 1.6	0/1.6	0 ... 250	0/250
				0 ... 2.5	0/2.5	0 ... 315	0/315
				0 ... 4	0/4	0 ... 400	0/400
				0 ... 6	0/6	0 ... 600	0/600
				Altro/another	*		*



- | | |
|--|---|
| • manometro molla bourdon | • bourdon tube pressure gauge |
| • materiale cassa in Acciaio Nero diametro cassa 63 mm | • Black Steel nominal size 63 mm |
| • esecuzione posteriore | • center back |
| • attacco al processo lega di rame | • process connection copper alloy |
| • elemento di misura lega di rame | • pressure element copper alloy |
| • movimento lega di rame | • movement copper alloy |
| • classe di precisione 1,6% f.s. | • accuracy class 1,6% |
| • quadrante alluminio bianco con fermo a zero | • dial aluminium white with pointer stop pin |
| • indice alluminio | • index aluminium |
| • trasparente in plastica | • window plastic |
| • normativa EN 837-1 | • design EN 837-1 |
| • temperatura ambiente -20 ... +60°C fluido +60°C | • temperature ambient -20 ... +60°C fluid +60°C |