



Pig tails and coil siphons are used for measuring pressure with vapour and are mounted between the instrument (pressure gauge, pressure switch, pressure transmitter) and the process.

A pipe portion is filled with condensation permanently preventing the instrument to get in contact with high temperature. These accessories may also be used for heating dispersion preventing the instrument to operate with dangerous temperature.

Female connection $\frac{1}{4}$ " x Male $\frac{1}{4}$ " gas Code A-RIC-INOX-G1/4"F-G1/4"M


Female connection $\frac{1}{2}$ " x Male $\frac{1}{2}$ " gas Code A-RIC-INOX-G1/2"F-G1/2"M

Female connection $\frac{1}{4}$ " x Male $\frac{1}{4}$ " npt Code A-RIC-INOX-N1/4"F-N1/4"M

Female connection $\frac{1}{2}$ " x Male $\frac{1}{2}$ " npt Code A-RIC-INOX-N1/2"F-N1/2"M

CONTROL PROCESS srl Sede Operativa Via Anzalone 22 95024 Acireale Catania (IT)

Tel + 39 095 721 38 41 mail info@controlprocess.it

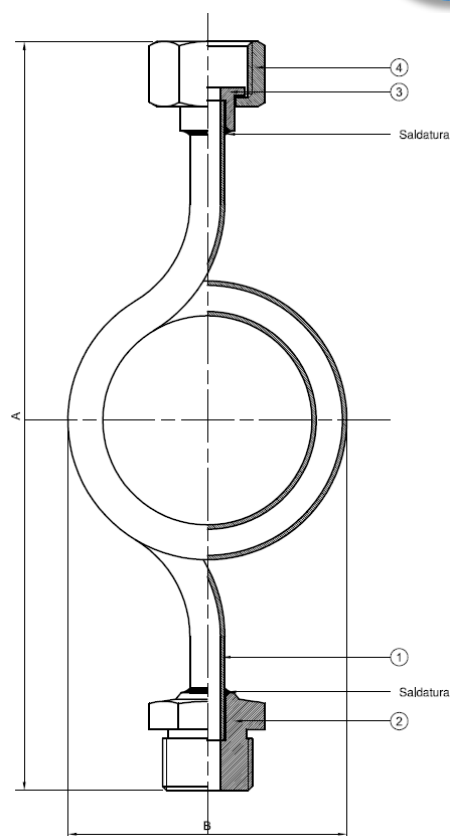

1	Tube		
2	Male connection		
3	Calotte		
4	Tank		
DN	A	B	
1/4"	195 mm	70 mm	
1/2"	210 mm	70 mm	